


# PRESSURE REGULATING ANTI-SIPHON VALVE

*Diesel*


*Petrol*

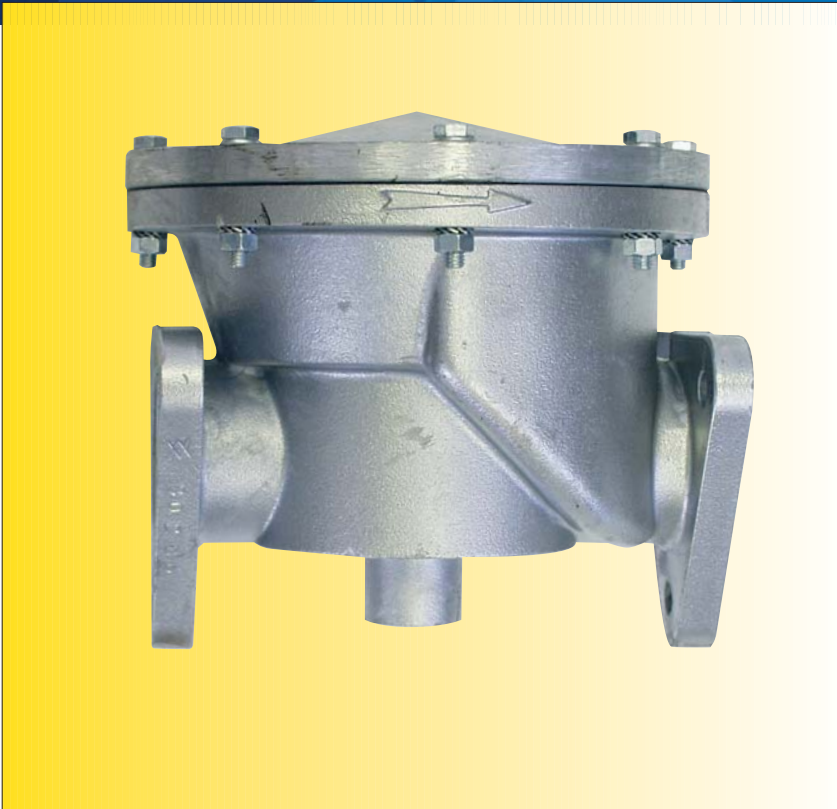

ENSURES THE SMOOTH RUNNING OF DISTRIBUTOR PUMPS WORKING FROM ABOVE GROUND TANKS.

- DESIGNED TO AVOID ACCIDENTAL EMPTYING OF ABOVE GROUND TANKS
- NO HEAD LOSS
- REGULATES AND STABILISES FLOW
- WORKS IN ALL POSITIONS (HORIZONTAL AND VERTICAL)
- FILTER PREVENTS IMPURITIES FROM JAMMING VALVE
- MAX FLOW RATE 110 LITRES/MIN  
ADJUSTABLE FLOW RATE
- 1 1/2" FEMALE FLANGE

MANUFACTURED IN CORROSION RESISTANT CADMIUM STEEL FOR LONG LIFE AND RELIABILITY, THE CTS VALVE IS DESIGNED FOR USE IN ALL TYPES OF OPERATING CONDITIONS NO MATTER HOW RUGGED. ALL SERVICING AND MAINTENANCE WORK ON THE VALVE CAN BE CARRIED OUT WITHOUT DISCONNECTING FUEL LINES.

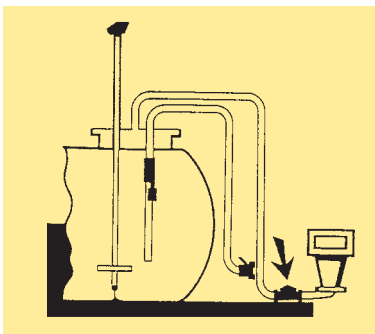

Example Installation Diagram

CODE	
Anti-Siphon Valve	<b>ND 4049</b>