


AIR OPERATED PUMPS

1:1 / 3:1 / 5:1

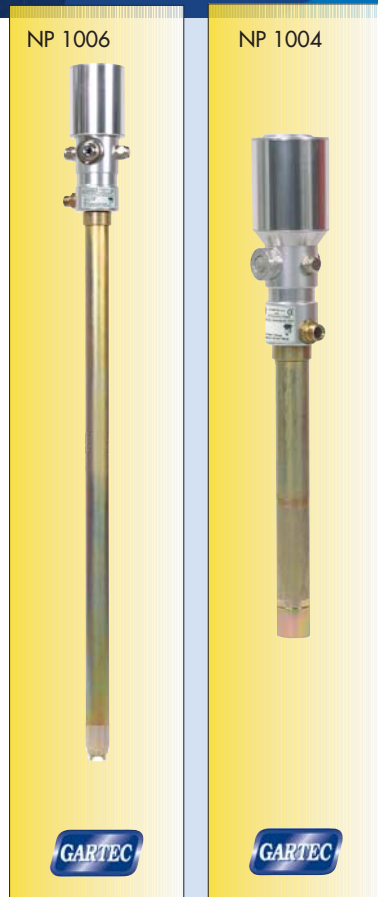

COMPRESSION RATIO 1:1 - 16 LTRS/MIN @ 6 BAR

MOD NP 1015 / NP 1016

SUITABLE FOR NEW OIL, USED OIL AND ANTI-FREEZE OVER SHORT DISTANCES.

COMPRESSION RATIO 3:1 - 13-18 LTRS/MIN @ 6 BAR

MOD NP 1001 / NP 1003 / NP 1021 / NP 1022

IDEAL FOR MOBILE DISTRIBUTION UNITS OR FIXED INSTALLATION WITH A MAXIMUM DISTANCE OF 20 METRES FROM THE PUMPING SITE TO THE DISPENSING SITE.

COMPRESSION RATIO 5:1 - 15 LTRS/MIN @ 6 BAR

MOD NP 1004 / NP 1006

IDEAL FOR FIXED INSTALLATION WITH A DISTANCE OF 20 METRES OR MORE FROM THE PUMPING SITE TO THE DISPENSING SITE AND NO NEED FOR HIGH VOLUME DELIVERY, E.G. AN INSTALLATION IN A CAR WORKSHOP WITH A DISTANCE OF 40 METRES FROM THE PUMPING SITE TO THE DISPENSING SITE.

PLEASE NOTE: THE AIR OPERATED PUMPS DO NOT COME WITH BUNG ADAPTORS

TECHNICAL INFORMATION

CODE	NP 1015	NP 1016	NP 1022	NP 1021	NP 1001	NP 1003	NP 1004	NP 1006
Ratio	1:1	1:1	3:1	3:1	3:1	3:1	5:1	5:1
Working Pressure Bar	6-8	6-8	6-8	6-8	6-8	6-8	6-8	6-8
Working Pressure Psi	90-120	90-120	90-120	90-120	90-120	90-120	90-120	90-120
Air Inlet	1/4" F BSP	1/4" F BSP	1/4" F BSP	1/4" F BSP	1/4" F BSP	1/4" F BSP	1/4" F BSP	1/4" F BSP
Oil Outlet	1/2" M BSP	1/2" M BSP	1/2" M BSP	1/2" M BSP	1/2" M BSP	1/2" M BSP	1/2" M BSP	1/2" M BSP
Noise	79dB	79dB	79dB	79dB	79dB	79dB	79dB	79dB
Air Consumption L/min	310	310	300	300	340	340	330	330
Suitable for Barrels (Litres)	STUB	180-220	STUB	180-120	STUB	180-220	STUB	180-220
Suitable for Barrels (Gallons)	STUB	45-55	STUB	48-55	STUB	48-55	STUB	48-55
Downpipe Length (mm)	290	940	290	940	290	940	290	940
Weight (Kg)	3.9	4.9	3.9	4.9	4.4	6.5	4.9	6.9
Ltrs/min @ 6 Bar	16	16	13	13	18	18	15	15

Also available 3:1 Ratio - 16 Ltrs & 28 Ltrs/min models

Also available 5:1 Ratio - 23 Ltrs/min models