




# AIR OPERATED PUMPS

## 50:1 / 60:1

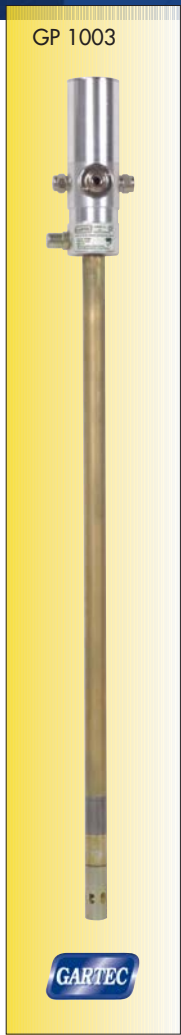

**COMPRESSION RATIO 50:1**

**ITEM GP 1012 / GP 1013 / GP 1014**

IDEAL FOR MOBILE DISTRIBUTION KITS OR FOR SHORT DISTANCE INSTALLATION.

**COMPRESSION RATIO 60:1**

**ITEM GP 1001 / GP 1002 / GP 1003**

IDEAL FOR AN INSTALLATION WITH SEVERAL DISPENSING POINTS WHERE QUANTITY REQUIRED IS LIMITED.

**PLEASE NOTE: THE AIR OPERATED PUMPS DO NOT COME WITH BUNG ADAPTORS**

**FOR ACCESSORIES SEE CATEGORY H - LUBRICATION SOLUTIONS**

**FOR GREASE PUMP ACCESSORIES SEE PAGE 36 AND FOR GREASE NOZZLES SEE PAGE 78**

**TECHNICAL INFORMATION**

CODE	GP 1012	GP 1013	GP 1014	GP 1001	GP 1002	GP 1003
Compression Ratio	50:1	50:1	50:1	60:1	60:1	60:1
Flow Rate @ 8 Bar gr/min	1300	1300	1300	1370	1370	1370
Working Pressure Bar	6-8	6-8	6-8	6-8	6-8	6-8
Working Pressure Psi	90-120	90-120	90-120	90-120	90-120	90-120
Air Inlet Connection	F <sup>1</sup> / <sub>4</sub> " BSP	F <sup>1</sup> / <sub>4</sub> " BSP	F <sup>1</sup> / <sub>4</sub> " BSP	F <sup>1</sup> / <sub>4</sub> " BSP	F <sup>1</sup> / <sub>4</sub> " BSP	F <sup>1</sup> / <sub>4</sub> " BSP
Grease Outlet Connection	F <sup>3</sup> / <sub>8</sub> " BSP	F <sup>3</sup> / <sub>8</sub> " BSP	F <sup>3</sup> / <sub>8</sub> " BSP	F <sup>3</sup> / <sub>8</sub> " BSP	F <sup>3</sup> / <sub>8</sub> " BSP	F <sup>3</sup> / <sub>8</sub> " BSP
Air Consumption	340	340	340	340	340	340
Noise	79	79	79	79	79	79
Diam. Suction Tube	32	32	32	32	32	32
Length Suction Tube	500	750	950	500	750	950
Dimensions Packing	130x130x780	130x130x1100	130x130x1300	130x130x780	130x130x1100	130x130x1300
Weight (Kg)	2.7	3.5	4.2	4.9	5.8	6.4