

X BSPP Nozzles



Automatic shut-off nozzle for full-service and self-service stations.

- X nozzle shuts off when the gas tank is full.
- Aluminum reinforced spout bushing keeps the spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Comes standard with smooth full grip guard.



New Unleaded Nozzles


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
159416	with Three Notch Hold Open Clip	3.0 (1.3)
159416A*	with Three Notch Hold Open Clip - Atex	3.0 (1.3)
E159416	with Three Notch Hold Open Clip	3.0 (1.3)
E159416A*	with Three Notch Hold Open Clip - Atex	3.0 (1.3)
159487A*	with Three Notch Hold Open Clip and Flo-Equalizer®	3.0 (1.3)
E538498	with Three Notch Hold Open Clip, Double Poppet, Waffle Splash Guard	3.0 (1.3)
159420	without Hold Open Clip	3.0 (1.3)
E159420	without Hold Open Clip	3.0 (1.3)

New Light Duty Diesel Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
159415	with Three Notch Hold Open Clip	3.1 (1.4)
159415A*	with Three Notch Hold Open Clip - Atex	3.1 (1.4)
E159415	with Three Notch Hold Open Clip	3.1 (1.4)
159486A*	with Three Notch Hold Open Clip and Flo-Equalizer®	3.1 (1.4)
E538499	with Three Notch Hold Open Clip, Double Poppet, Waffle Splash Guard	3.1 (1.4)
159419	without Hold Open Clip	3.1 (1.4)
E159419	without Hold Open Clip	3.1 (1.4)

CONSTRUCTION

Body	One Piece Die Cast Aluminum
Seals	Fluorocarbon
Packing	Double O-Ring Seal Protected by Fiber Reinforced Teflon®
Lever	One-Piece Contoured Steel with Hard Plastic Cover
Inlet	3/4" / 19 mm NPT Threads

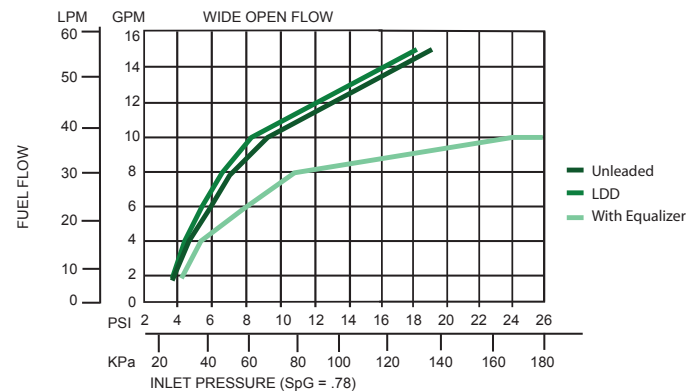

0518
II 1 G
EN 13012
TYPE 1



X BSPP Nozzles

Automatic shut-off nozzle for full-service and self-service stations.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
3385	¾" F x ¾" F BSPP Reconnectable Safe-T-Break®
2774	¾" F x ¾" F BSPP Non-Reconnectable Safe-T-Break®
2774A	¾" F x ¾" F BSPP Non-Reconnectable Safe-T-Break® - Atex

Swivels

MODEL NO.	DESCRIPTION
3590	¾" M x ¾" F BSPP Multi-Plane Swivel
3590W	¾" M x ¾" F BSPP Multi-Plane Swivel with Warm Weather Seals
2771	¾" M x ¾" F BSPP 90° Pump Swivel

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
7085	¾" M BSPP Multi-Plane Swivel Connected to ¾" F BSPP Reconnectable Safe-T-Break®

Spouts


MODEL NO.	DESCRIPTION
1473	Unleaded Spout without Flo-Stop®
10434	Unleaded Long Spout without Flo-Stop®
1471	Light Duty Diesel Spout without Flo-Stop®
10353	Light Duty Diesel Long Spout without Flo-Stop®
8862	Light Duty Diesel Spout without Flo-Stop® with StreamShaper®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
4620	2" Slip-On Pressure Vacuum Vent
4885	2" Thread-On Pressure Vacuum Vent - NPT
5885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
0397	Unleaded Spout Gauge
4490	Conventional Flo-Equalizer® - 10 gpm/37.9 Lpm
7490	Internal Flo-Equalizer® - 10 gpm/37.9 Lpm

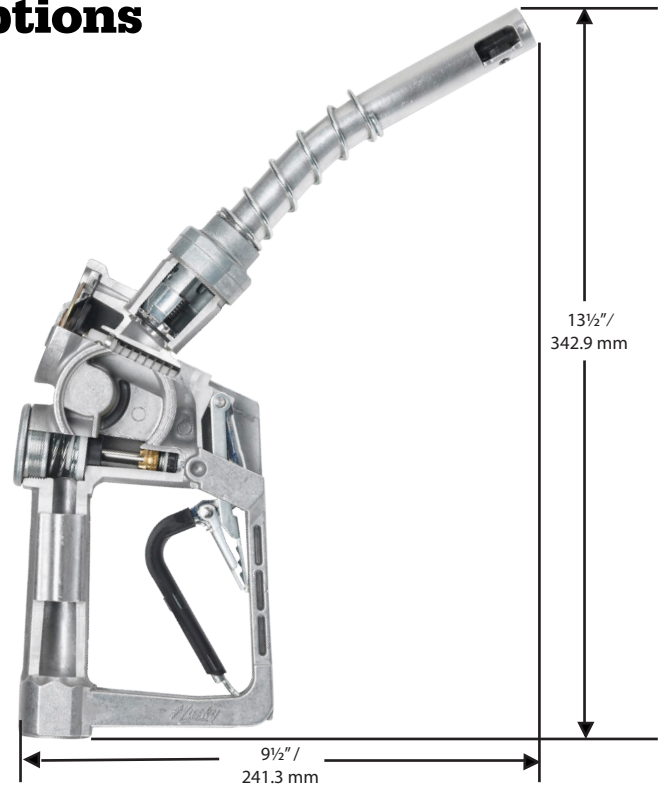

Guards

MODEL NO.	DESCRIPTION
3376	Black Handle Cover
4145	Full Grip Guard
1806	Full Grip Reguard
5494	Lever Guard
3795	Mate Guard
1808	Waffle Splash Guard
3440	Mate Easy-on Package
1506	Protection Package
1809	Reguard Protection Package
8175	POPD® EZS Nozzle Guard
8176	POPD® EZH Nozzle Guard
7999	POPD® H Clear Cover
8166	POPD® H Mate Guard
8185	POPD® H Full Grip Guard
8192	POPD® H Full Grip Reguard
6628	POPD® S Clear Cover
6665	POPD® S Full Grip Guard
7205	POPD® S Full Grip Reguard
8165	POPD® S Mate Guard



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.